

SUBWOOFER



Series




HAMMER-12

SUBWOOFER

Hammer 12 is perfect subwoofer for a high-end home cinema. It is equipped with long-excursion 12" woofer. A special slim design allows to put the subwoofer in an extremely narrow space behind the screen, and with an optional brackets, Hammer 12 is easily mounted directly on the wall.

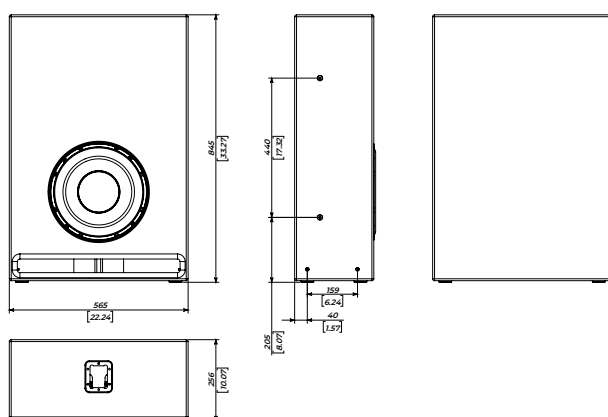

WMT-12 - Anti-vibration wall bracket

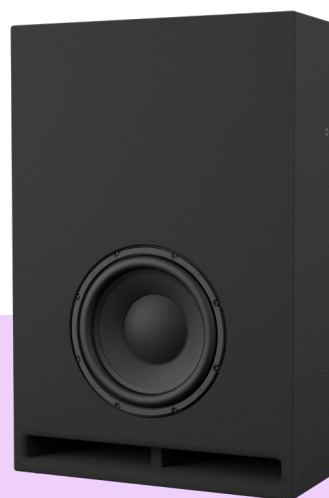

SPECIFICATIONS

Frequency Response (± 3 dB)	22 – 120 Hz
Frequency range (-10 dB)	20 – 160 Hz
Max SPL	See CTA table
Sensitivity (1W/1m)	92 dB
Low-frequency woofer	12-inch 3-inch voice coil glass-fiber reinforced cone
Nominal impedance	4 Ohm / 8 Ohm
Power rating ¹	800 W
Connectors	Banana terminals
Mounting	4 × M8 points for antishock wall mounting, 4 × M5 points for floor bracket
Dimension (W × H × D)	565 × 845 × 256 mm / 22.24" × 33.27" × 10.08"
Net weight	36 kg / 79.4 lbs

¹ – 2 hour power test, IEC filtered noise, 6 dB crest factor

CTA-2010 RESULTS

SPL(dB) scaled to 1m peak equivalent

Model	Driver	Loading	Dimensions W × H × D		avg				avg					
Hammer 12	12"	ported	565 × 845 × 256 mm	80 Hz	40-63 Hz	63 Hz	50 Hz	40 Hz	20-31.5 Hz	31.5 Hz	25 Hz	20 Hz	18 Hz	16 Hz
				128.5	125.4	127.5	125	123	118.1	121	120	109	101.5	95.5

SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).

4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.